



# VERSATI IV MONOBLOC 8kW

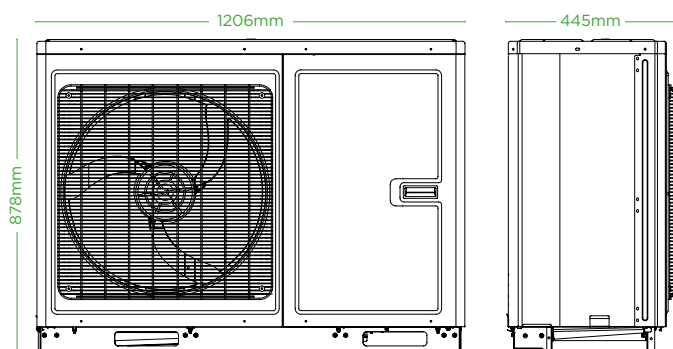

Model			VERSATI 8kW
Code			ER01001890
Capacity <sup>1</sup>	Heating (floor heating)	kW	8.20
	Cooling (floor cooling)	kW	8.20
Power Input <sup>1</sup>	Heating (floor heating)	kW	1.5
	Cooling (floor cooling)	kW	1.6
EER <sup>1</sup>	Cooling (floor cooling)	-	5.32
COP <sup>1</sup>	Heating (floor heating)	-	5.32
Capacity <sup>2</sup>	Heating (Fan coil or Radiator)	kW	8.30
	Cooling (for Fan coil)	kW	7.40
Power Input <sup>2</sup>	Heating (Fan coil or Radiator)	kW	1.9
	Cooling (for Fan coil)	kW	2.0
EER <sup>2</sup>	Cooling (for Fan coil)	-	3.70
COP <sup>2</sup>	Heating (Fan coil or Radiator)	-	4.36
Power Supply	V/Ph/Hz	-	230/1/50
Rated input	Cooling	kW	5.2+6.0
	Heating	kW	3.8
Rated current	Cooling	A	16.50
	Heating	A	23.00
Refrigerant	Type	-	R32
	Charge	kg	1.60
	Control	-	Electronic Expansion Valve
Heat exchanger (Water side)	Type	-	Brazed Plate HEX
	Water Flow Volume	l/m	16.6
	Inlet/Outlet Water Pipe Diameter	mm	25
Sanitary water Temperature Range			°C 40-80
Outflow Water Temperature Range	Cooling to Fan Coil	°C	7
	Cooling to Floor	°C	18
	Heating to Fan Coil	°C	45
	Heating to Floor	°C	35
Operating Range Outdoor Temperature (DB)	Cooling	°C	-15-48
	Heating	°C	-25-35
	Water Heating	°C	-25-45
Sound Pressure Level	Cooling	dB(A)	52
	Heating	dB(A)	54
Dimensions	Outline (HxWxD)	mm	878x1206x445
	Packaged (HxWxD)	mm	1020x1338x553
Weight	Net	kg	127
	Gross	kg	146

# VERSATI IV MONOBLOC 10kW

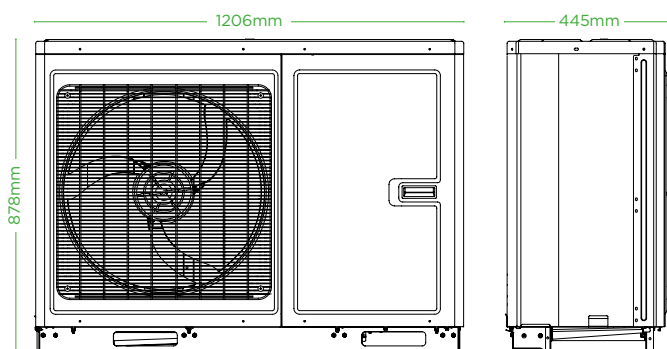

Model			VERSATI 10kW
Code			ER01001963
Capacity <sup>1</sup>	Heating (floor heating)	kW	10.20
	Cooling (floor cooling)	kW	10.20
Power Input <sup>1</sup>	Heating (floor heating)	kW	2.02
	Cooling (floor cooling)	kW	2
EER <sup>1</sup>	Cooling (floor cooling)	-	5.1
COP <sup>1</sup>	Heating (floor heating)	-	5.05
Capacity <sup>2</sup>	Heating (Fan coil or Radiator)	kW	10.20
	Cooling (for Fan coil)	kW	9
Power Input <sup>2</sup>	Heating (Fan coil or Radiator)	kW	2.5
	Cooling (for Fan coil)	kW	2.65
EER <sup>2</sup>	Cooling (for Fan coil)	-	3.40
COP <sup>2</sup>	Heating (Fan coil or Radiator)	-	4.08
Power Supply	V/Ph/Hz	-	230/1/50
Rated input	Cooling	kW	4
	Heating	kW	5.75+6.0
Rated current	Cooling	A	17.5
	Heating	A	25.00
Refrigerant	Type	-	R32
	Charge	kg	1.60
	Control	-	Electronic Expansion Valve
Heat exchanger (Water side)	Type	-	Brazed Plate HEX
	Water Flow Volume	l/m	16.6
	Inlet/Outlet Water Pipe Diameter	mm	25
Sanitary water Temperature Range			°C 40-80
Outflow Water Temperature Range	Cooling to Fan Coil	°C	7
	Cooling to Floor	°C	18
	Heating to Fan Coil	°C	45
	Heating to Floor	°C	35
Operating Range Outdoor Temperature (DB)	Cooling	°C	-15-48
	Heating	°C	-25-35
	Water Heating	°C	-25-45
Sound Pressure Level	Cooling	dB(A)	54
	Heating	dB(A)	56
Dimensions	Outline (HxWxD)	mm	878x1206x445
	Packaged (HxWxD)	mm	1020x1338x553
Weight	Net	kg	120
	Gross	kg	139

## NOTE:

### Capacities and power inputs are based on the following conditions:

<sup>1</sup> Cooling conditions –  
Indoor Water Temperature 23°C/18°C;  
Outdoor Air Temperature 35°CDB/24°CWB

<sup>2</sup> Heating conditions  
Indoor Water Temperature 30°C/35°C  
Outdoor Air Temperature 7°CDB/6°CWB


### Capacities and power inputs are based on the following conditions:

<sup>1</sup> Cooling conditions  
Indoor Water Temperature 12°C/7°C;  
Outdoor Air Temperature 35°CDB/24°CWB

<sup>2</sup> Heating conditions –  
Indoor Water Temperature 40°C/45°C;

# Versati IV


## MONOBLOC 12kW

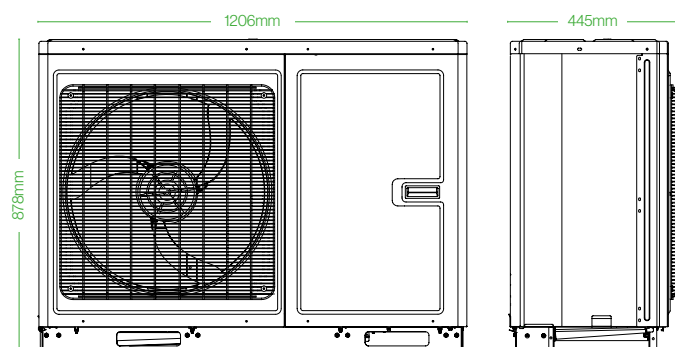

Model			VERSATI 12KW
Code			ER01001930
Capacity <sup>1</sup>	Heating (floor heating)	kW	12.00
	Cooling (floor cooling)	kW	12.00
Power Input <sup>1</sup>	Heating (floor heating)	kW	2.4
	Cooling (floor cooling)	kW	2.4
EER <sup>1</sup>	Cooling (floor cooling)	-	4.90
COP <sup>1</sup>	Heating (floor heating)	-	4.94
Capacity <sup>2</sup>	Heating (Fan coil or Radiator)	kW	13.00
	Cooling (for Fan coil)	kW	11.10
Power Input <sup>2</sup>	Heating (Fan coil or Radiator)	kW	3.4
	Cooling (for Fan coil)	kW	3.6
EER <sup>2</sup>	Cooling (for Fan coil)	-	3.10
COP <sup>2</sup>	Heating (Fan coil or Radiator)	-	3.77
Power Supply	V/Ph/Hz	-	230/1/50
Rated input	Cooling	kW	6.854+6.000
	Heating	kW	3.9
Rated current	Cooling	A	17.00
	Heating	A	30.00
Refrigerant	Type	-	R32
	Charge	kg	2.20
	Control	-	Electronic Expansion Valve
Heat exchanger (Water side)	Type	-	Brazed Plate HEX
	Water Flow Volume	l/m	33
	Inlet/Outlet Water Pipe Diameter	mm	25
Sanitary water Temperature Range			°C 40-80
Outflow Water Temperature Range	Cooling to Fan Coil	°C	7
	Cooling to Floor	°C	18
	Heating to Fan Coil	°C	45
	Heating to Floor	°C	35
Operating Range Outdoor Temperature (DB)	Cooling	°C	-15-48
	Heating	°C	-25-35
	Water Heating	°C	-25-45
Sound Pressure Level	Cooling	dB(A)	54
	Heating	dB(A)	56
Dimensions	Outline (HxWxD)	mm	878x1206x445
	Packaged (HxWxD)	mm	1020x1338x553
Weight	Net	kg	142
	Gross	kg	161

# Versati IV

## MONOBLOC 16kW

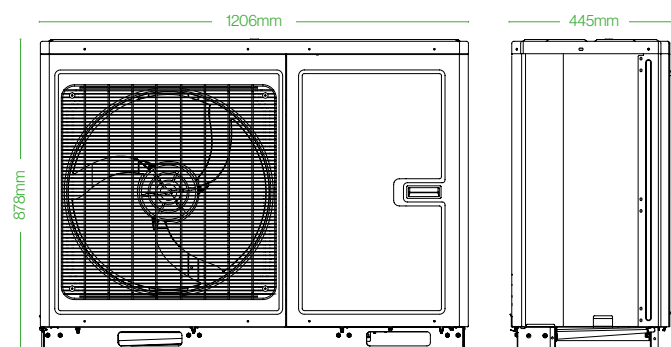

Model			VERSATI 16KW
Code			ER01001970
Capacity <sup>1</sup>	Heating (floor heating)	kW	15.70
	Cooling (floor cooling)	kW	15.50
Power Input <sup>1</sup>	Heating (floor heating)	kW	3.4
	Cooling (floor cooling)	kW	3.6
EER <sup>1</sup>	Cooling (floor cooling)	-	4.31
COP <sup>1</sup>	Heating (floor heating)	-	4.55
Capacity <sup>2</sup>	Heating (Fan coil or Radiator)	kW	16.20
	Cooling (for Fan coil)	kW	13.80
Power Input <sup>2</sup>	Heating (Fan coil or Radiator)	kW	4.5
	Cooling (for Fan coil)	kW	5.1
EER <sup>2</sup>	Cooling (for Fan coil)	-	2.71
COP <sup>2</sup>	Heating (Fan coil or Radiator)	-	3.61
Power Supply	V/Ph/Hz	-	230/1/50
Rated input	Cooling	kW	6.9+6.0
	Heating	kW	5.3
Rated current	Cooling	A	23.00
	Heating	A	30.00
Refrigerant	Type	-	R32
	Charge	kg	2.20
	Control	-	Electronic Expansion Valve
Heat exchanger (Water side)	Type	-	Brazed Plate HEX
	Water Flow Volume	l/m	50
	Inlet/Outlet Water Pipe Diameter	mm	25
Sanitary water Temperature Range			°C 40-80
Outflow Water Temperature Range	Cooling to Fan Coil	°C	7
	Cooling to Floor	°C	18
	Heating to Fan Coil	°C	45
	Heating to Floor	°C	35
Operating Range Outdoor Temperature (DB)	Cooling	°C	-15-48
	Heating	°C	-25-35
	Water Heating	°C	-25-45
Sound Pressure Level	Cooling	dB(A)	56
	Heating	dB(A)	59
Dimensions	Outline (HxWxD)	mm	878x1206x445
	Packaged (HxWxD)	mm	1020x1338x553
Weight	Net	kg	142
	Gross	kg	161